SW585N-144

N Type TOPcon 144 Cells 565W-585W

Mono Solar Panel Features

- Widely using of the most popular and mature type of modules for solar system
- High power output and highest conversion efficiency of 22.65%
- Anti-reflective and anti-soiling surface reduces power loss from dirt and dust
- Outstanding Performance in low-light irradiance environments
- 5400Pa — Excellent mechanical load resistance: Certified to withstand high wind loads (2400Pa) and Snow loads (5400Pa)
- 0~+5W — Positive power tolerance: 0~+5W

Warranty

- 12 years for product defects in materials & workmanship
- 12 years for 90% of warranted minimum power output
- 30 years for 80% of warranted minimum power output
- 30 years liner warranty

Reliable Quality

- Positive power tolerance: 0~+5W
- 100% EL Double-inspection ensures modules are defects free
- Modules Binned by Current to improve system performance
- Potential induced Degradation (PID) Resistant

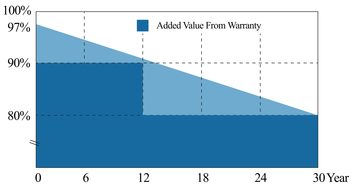

SUNWAYTECH
YOUR PROFESSIONAL PV SUPPLIER

Mechanical parameters

Cell(mm)	N Type Mono
Weight(kg)	28kg
Glass Thickness	3.2mm
Dimensions (L*W*H)(mm)	2278*1134*30mm
Cable Cross Section Size (mm²)	4
Cable Cross Section Length (mm)	300
No.of Cells and Connections	144(6*24)
Junction Box	IP68
Connector	MC4 Compatiple

Working Conditions

Maximum System Voltage	DC 1000V/1500V(IEC)
Operating Temperature	-40℃~+85℃
Maximum Series Fuse	25A
Maximum Static Load,Front (e.g.,snow and wind)	5400Pa (112 lb/ft²)
Maximum Static Load,Back (e.g.,wind)	2400Pa (50 lb/ft²)
NOCT	43±2℃
Positive power tolerance	0~+5W
Application Class	Class A

Engineering Drawings



Modules Per Pallet	36Pcs
Modules Per 40HQ	720Pcs

Electrical Parameters

Module	SW565N-144 ~ SW585N-144				
Encapsulation	Class/Eva/Cell/Eva/Backsheet				
Maximum Power Pmax (W)	565	570	575	580	585
Maximum Power Voltage (Vmp/V)	41.92	42.07	42.22	42.37	42.52
Maximum Power Current (Imp/A)	13.48	13.55	13.62	13.69	13.76
Open Circuit Voltage (Voc/V)	50.60	50.74	50.88	51.02	51.16
Short Circuit Current (Isc/A)	14.23	14.31	14.39	14.47	14.55
Module Efficiency (%)	21.87	22.07	22.26	22.45	22.65
Power Tolerance (W)	0~+5W				
Temperature Coefficient of Isc (αIsc)	+0.045%/℃				
Temperature Coefficient of Voc (βVoc)	-0.25%/℃				
Temperature Coefficient of Pmax (γPmp)	-0.29%/℃				
STC	Irradiance 1000W/㎡, Cell Temperature 25℃, Air Mass 1.5				

I-V Curve





Sunway Solar Co., Ltd. + 86 138 6693 1144 info@sunwaypv.com www.sunwaypv.com